

# 9220 Dual Bay Series Low Voltage/High Current Cycler

Automated Characterization, Power Cycling, & Life-Cycle Testing  
of Low Voltage/High Current Batteries

**NHR**  
NH Research

## Key Features

- Single output up to 40V/3,600A/72kW per system
- Parallel expansion up to 7,200A
- Built-in digital measurements including Ah & kWh
- Multiple safety layers to protect battery/DUT
- SCPI, VXI-11, & LabVIEW control via LAN interface
- NI-Compliant LabVIEW Drivers
- 87% efficiency returning discharge power to facility
- Crane/hoist lifting hangers & robust casters

## High Current Battery Testing

The 9220 Dual Bay Series Test System is designed for testing all battery chemistries including lead-acid, lead-cadmium, and other low voltage, high current, large format batteries (LFB) typically used in energy storage systems (ESS). The system is bi-directional requiring no additional equipment to charge or discharge the unit-under-test (UUT). Additionally, the built-in measurement system eliminates external measurement devices by providing time-stamped digital readings for voltage, current, power as well as Ah and kWh.

## Recycle Discharge Power Back to the Facility

Unlike typical high-current systems which convert battery discharge power into waste heat, the 9220 Dual Bay converts up to 87% of the battery discharge power into usable electrical power that precisely matches the facility's AC line. This process, called regeneration, results in lower operating costs, reduces air-conditioning usage, eliminates expensive water cooling systems, and often provides enough savings to payback the entire system within a few years.

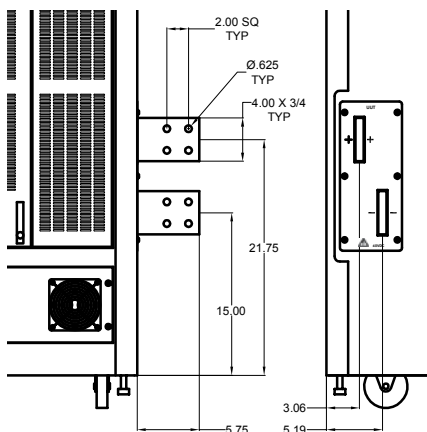


Figure 1 - Caster & output connections



9220 Dual Bay Test System front panel view

## System Cabinet Features for Easy Installation

The 9220 Dual Bay has been designed with vertical lifting hangers at each corner allowing the entire system to be lifted using a 4-point hoist or crane. Each hanger has been designed to safely support up to 3000 lbs. when the system is lifted with 1/2" grade 8 bolts.

The system has been equipped with robust casters (Fig.1) permitting easy movement for final placement within or reconfiguration of the laboratory.

Output connections are solid 4"x 3/4" (102mm x 19mm) buss bars which have been staggered to minimize the risk of accidental shorting. Each buss bar provides four 5/8" (15.88mm) mounting holes on 2" (50.8mm) centers allowing for easy connection of additional buss bars or heavy duty power cables.

## 9220 Series Dual Bay Specifications

	Model 9220-4904-48	Model 9220-4904-60	Model 9220-4904-72
<b>Programming Capability</b>	Charge (Source), Discharge (Load), Standby, Battery Emulation		
Operating States	Constant-Voltage(CV), Current (CC), Power (CP), Series Resistance (CR)		
Charge/Discharge Modes			
Charging Envelope	0-40V, 32kW, 2400A	0-40V, 40kW, 3000A	0-40V, 48kW, 3600A
Discharging Envelope	1-40V, 48kW, 2400A	1-40V, 60kW, 3000A	1-40V, 72kW, 3000A
Slew Rate			
Voltage	0.012V/s – 80V/ms	0.012V/s – 80V/ms	0.012V/s – 80V/ms
Current	0.68A/s – 12kA/ms	0.85A/s – 15kA/ms	1.02A/s – 18kA/ms
Power	8W/s – 32kW/ms	10W/s – 40kW/ms	12W/s – 48kW/ms
Resistance	2.5mΩ/s – 8.4Ω/ms	2.0mΩ/s – 6.7Ω/ms	1.7mΩ/s – 5.6Ω/ms
Current Change Time	Less than 10mS		
Paralleling	Up to two (2) systems with synchronous set & measurement control		
<b>Macro Test Profiles</b>			
Development Source	LabVIEW or PowerPanel		
Maximum Steps	1000		
Minimum Time Delay	50uS		
Maximum Step Delay	1mS - 7 Days		
<b>Programming</b>	Range	Accuracy <sup>1</sup>	Res. <sup>2</sup>
Voltage	0-40V	0.1% + 0.1%	0.005%
Current	±2400A	0.2% + 0.2%	0.005%
Power (Charge)	32kW	0.3% + 0.3%	0.005%
Power (Discharge)	48kW	0.3% + 0.3%	0.005%
Resistance	0-8.4Ω	2%	0.005%
	Range	Accuracy <sup>1</sup>	Res. <sup>2</sup>
Voltage	0-40V	0.1% + 0.1%	0.005%
Current	±3000A	0.2% + 0.2%	0.005%
Power (Charge)	40kW	0.3% + 0.3%	0.005%
Power (Discharge)	60kW	0.3% + 0.3%	0.005%
Resistance	0-6.7Ω	2%	0.005%
	Range	Accuracy <sup>1</sup>	Res. <sup>2</sup>
Voltage	0-40V	0.1% + 0.1%	0.005%
Current	±3600A	0.2% + 0.2%	0.005%
Power (Charge)	48kW	0.3% + 0.3%	0.005%
Power (Discharge)	72kW	0.3% + 0.3%	0.005%
Resistance	0-5.6 Ω	2%	0.005%
<b>Measurement (4-Wire)</b>	Range	Accuracy <sup>3</sup>	Res. <sup>2</sup>
Voltage,	0-40V	0.05% + 0.05%	0.005%
Current	±2400A	0.1% + 0.1%	0.005%
Power	±48kW	0.12% + 0.12%	0.005%
Time	1mS - 1Yr	0.1%	
	Range	Accuracy <sup>3</sup>	Res. <sup>2</sup>
Voltage,	0-40V	0.05% + 0.05%	0.005%
Current	±3000A	0.1% + 0.1%	0.005%
Power	±60kW	0.12% + 0.12%	0.005%
Time	1mS - 1Yr	0.1%	
<b>Control</b>			
Communications	LAN (Ethernet)		
Drivers	SCPI, VXI-11, LabVIEW (Non-OS Specific)		
Software Tools	Windows based applications including Power Panel, Firmware Update & Calibration		
<b>Safety</b>			
Isolation AC Input	1000V AC Input to DC Output/1000V AC Input to chassis		
Isolation UUT Input	600V UUT to chassis		
Programmable Limits	Over-Voltage (OV), Under-Voltage (UV), Over-Power (OP), Internal Over Temperature		
Interlocks	External user input, emergency stop, and rear service doors		
Watchdog Timer	Continuously monitors control communications		
<b>Physical</b>			
Operating Temperature	0-35°C full power		
Output Connections	Buss Bars		
Cabinet Dimensions (HxWxD)	83.25 x 56.56 x 34.5"/2115 x 1436 x 876mm including lift tabs and casters		
Facility Input	3φ, 50-60Hz 380VAC, 400VAC, 480VAC (input voltage to be specified at time of order)		
<b>Input Power</b>			
3φ 380VAC	64 A	80 A	96 A
3φ 400VAC	62 A	77 A	92 A
3φ 480VAC	51 A	64 A	76 A
Cabinet Weight	2150lbs/975kg	2450lbs/1111kg	2750lbs/1247kg
<b>Calibration</b>	Semi-Automatic, closed cover with standard lab equipment		

<sup>1</sup> Accuracies are % of Set + % of Range,

<sup>2</sup> Resolutions are % of Range unless otherwise indicated

<sup>3</sup> Measurement Accuracies are % of Reading + % of Range

## Ordering Information

	Series	Voltage (40V)	Power Level (kW)
Model Number Construction	9220	-4904	-48



16601 Hale Avenue, Irvine, California 92606  
 Tel: (949) 474-3900  
 Email: sales@nhresearch.com

www.nhresearch.com

© Copyright 2017, NH Research Incorporated. Pub 11-15-17 JC  
 All rights reserved. Specifications subject to change without notice.